

0908729-40044

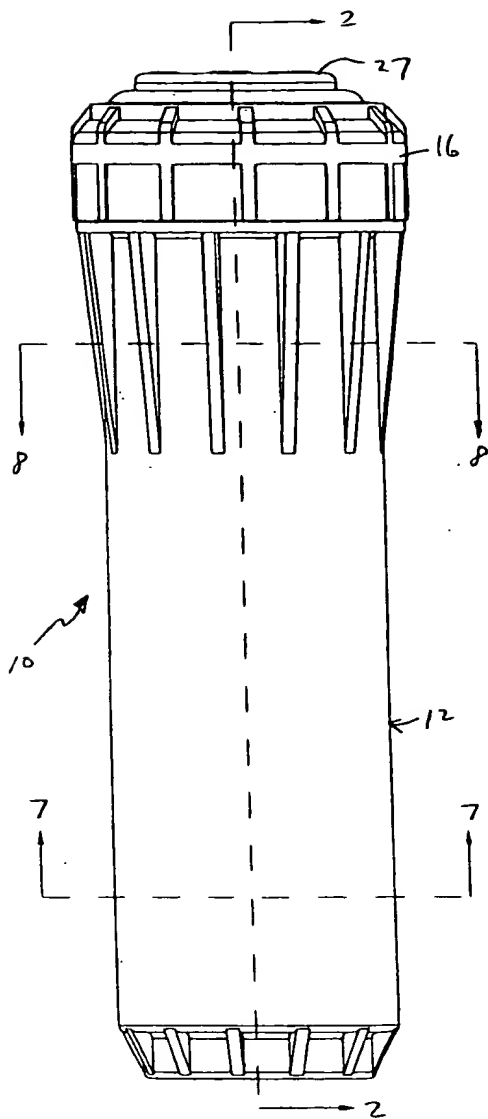


Fig. 1

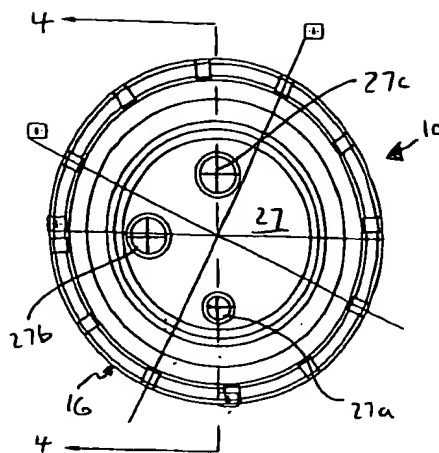


Fig. 3

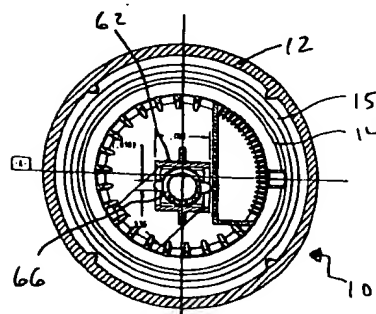


Fig. 5

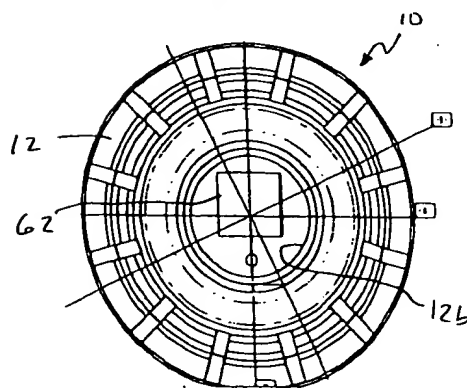


Fig. 6

0950725 100404


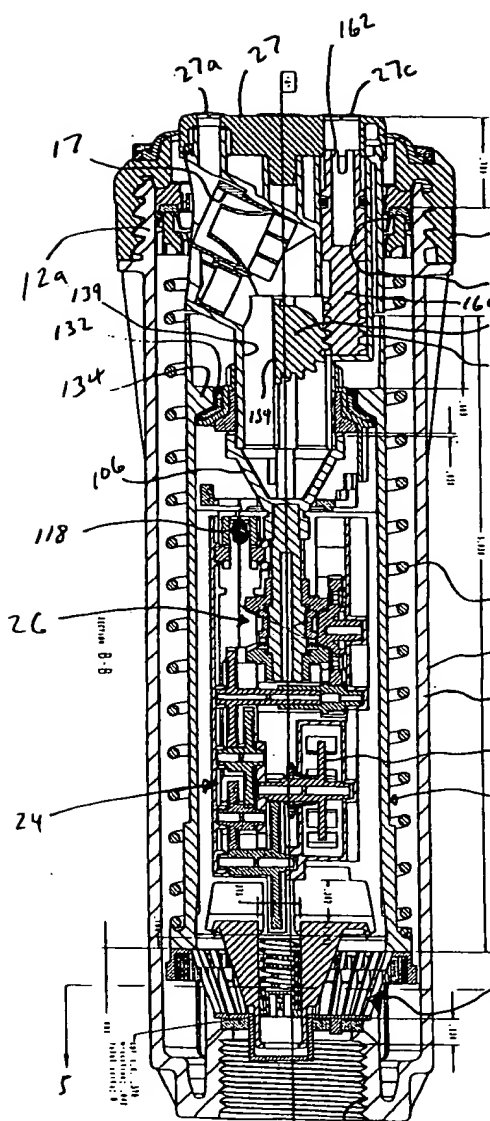


Fig. 4 12b

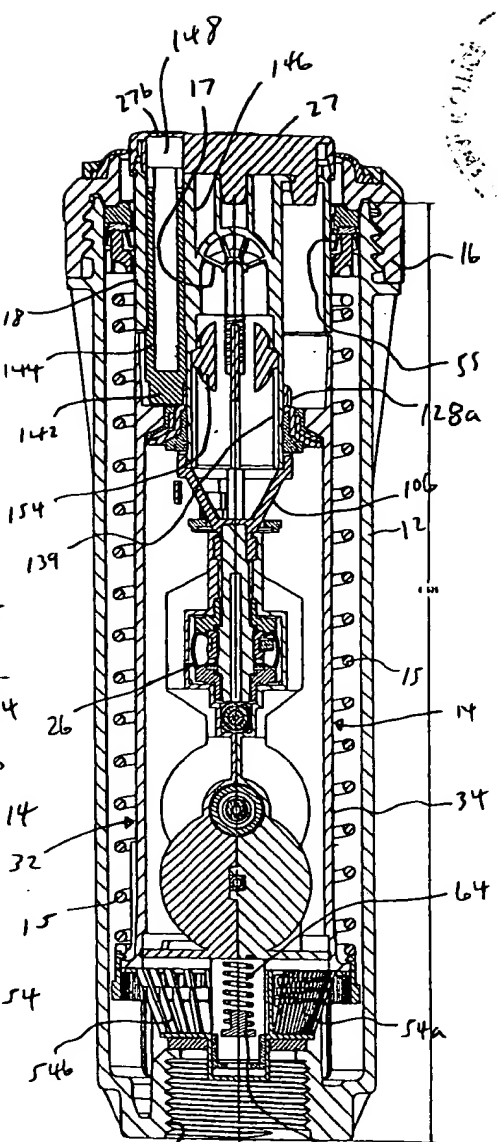

12b Fig. 2 66

05656729-400404

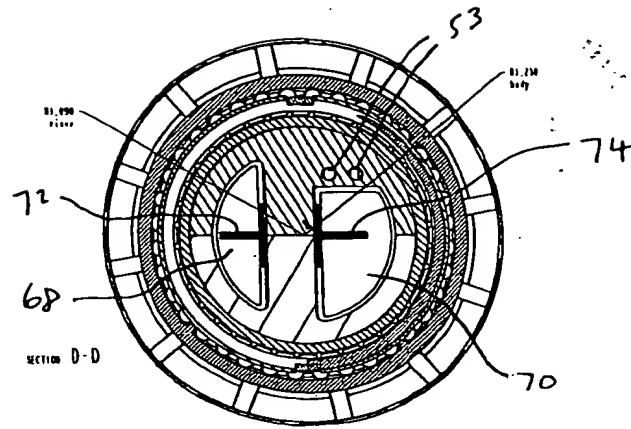


Fig. 7

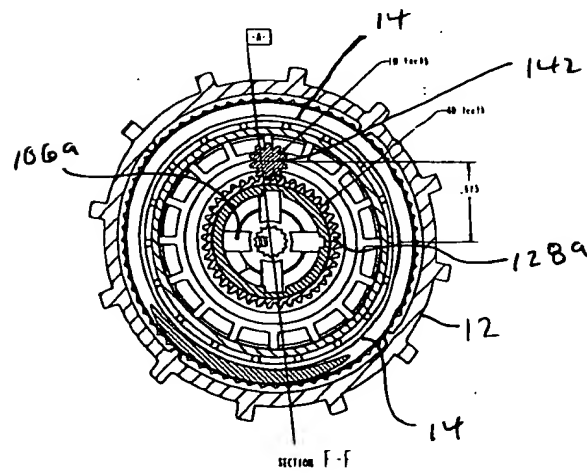


Fig. 8

Fig. 9

09090729 "4.00.4.04"

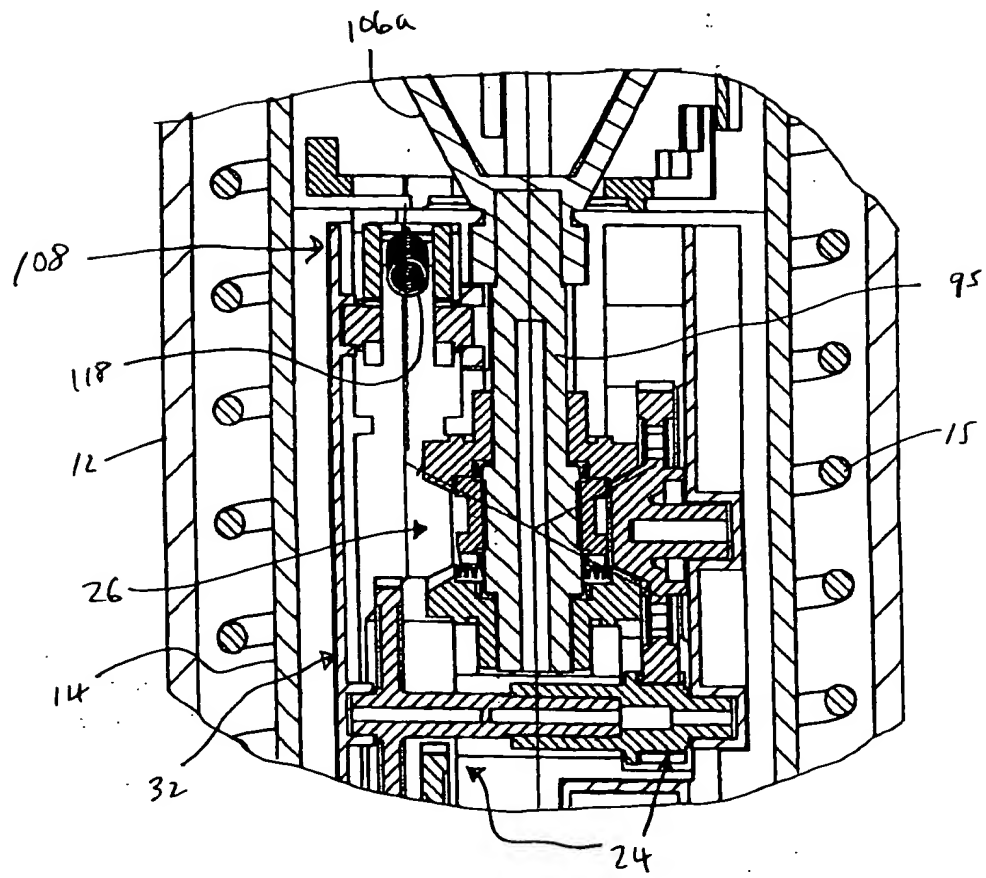


Fig. 10

13 \longleftrightarrow 14

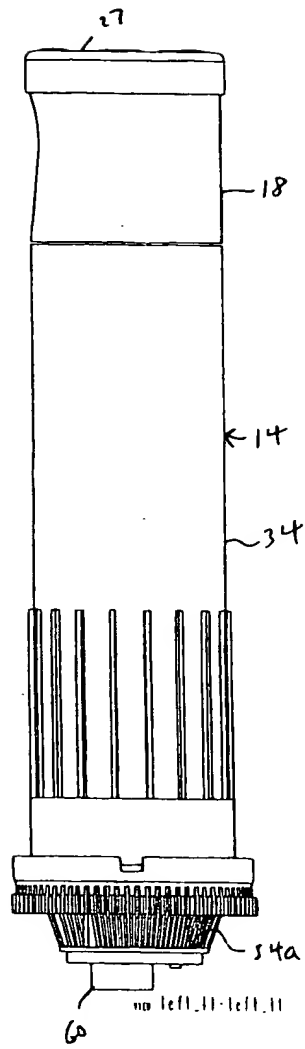


Fig. 11

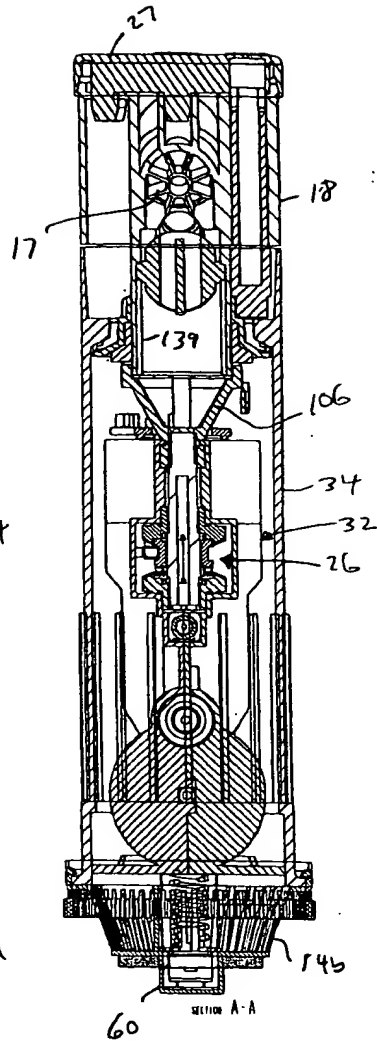


Fig. 13

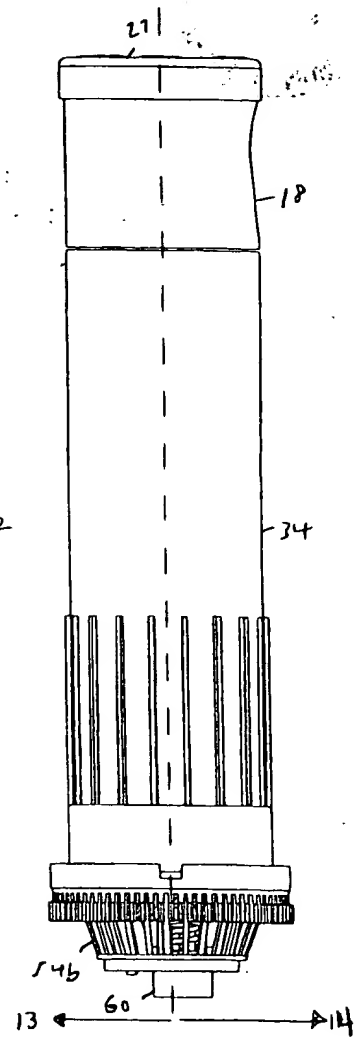


Fig. 12A

00000729 400404

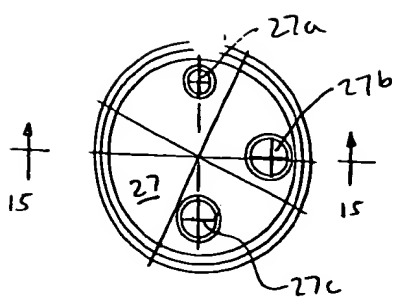


Fig. 12B




Fig. 16

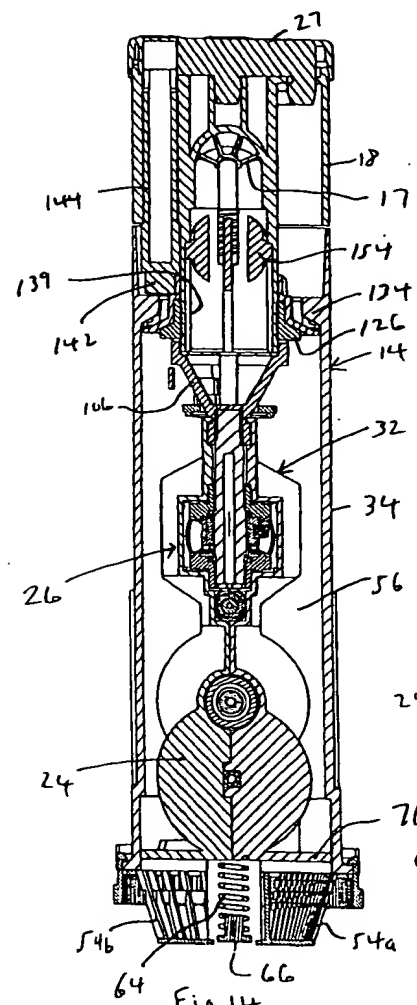


Fig. 14

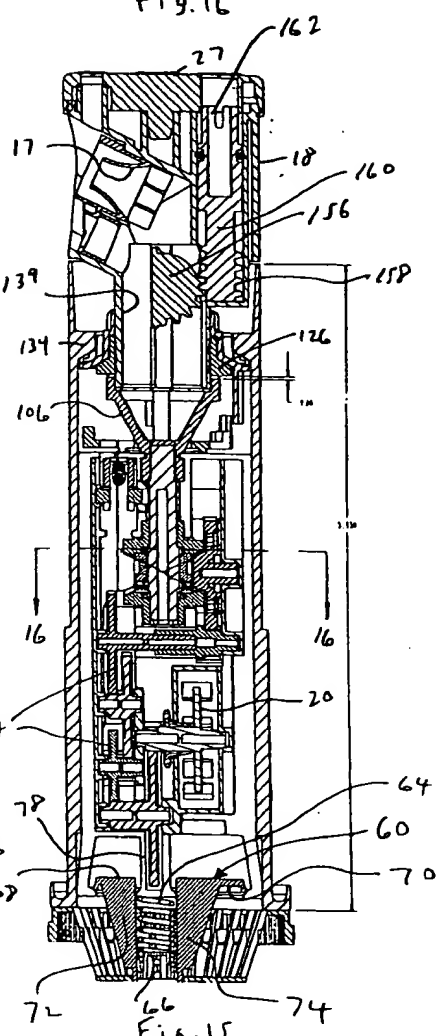


Fig. 15

09090729 400404

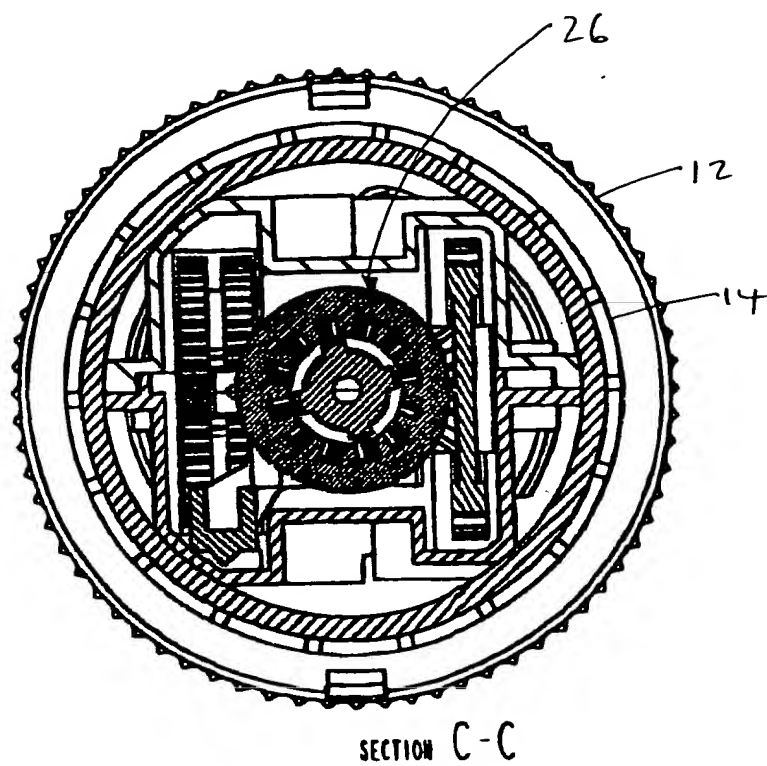


Fig. 17




Fig. 19

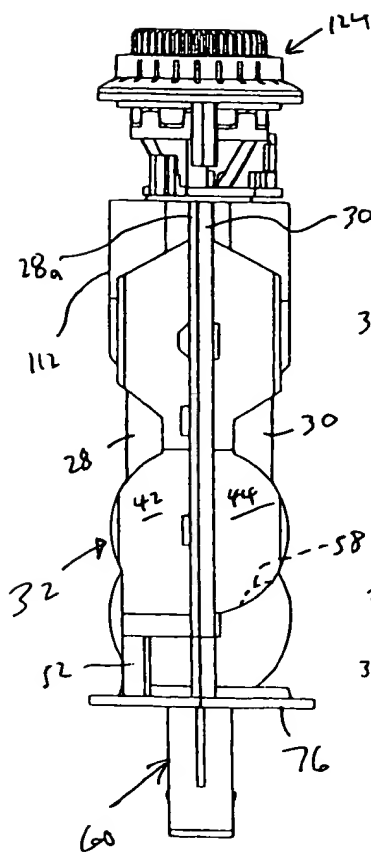


Fig. 18

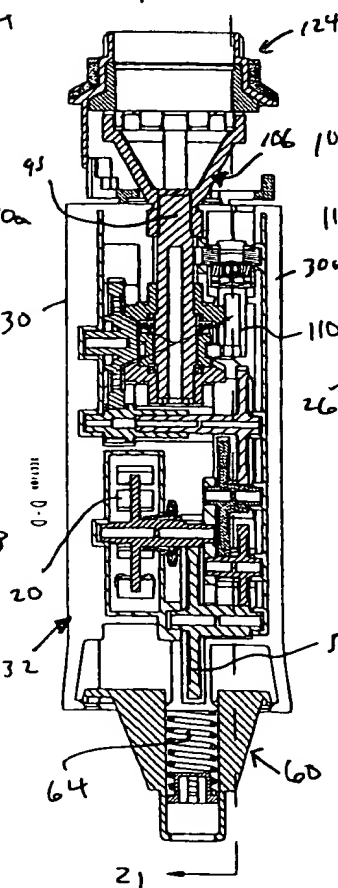


Fig. 20




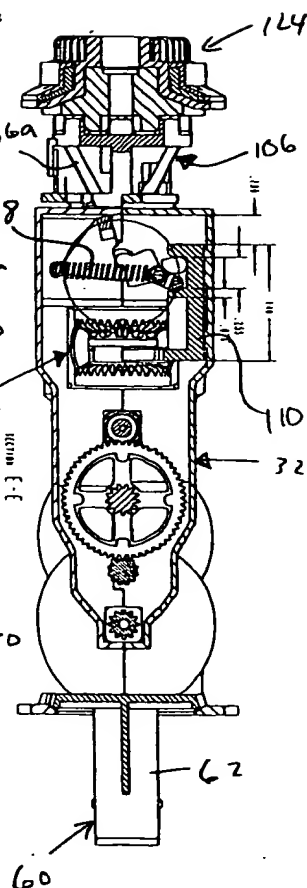


Fig. 21


00000729 400404

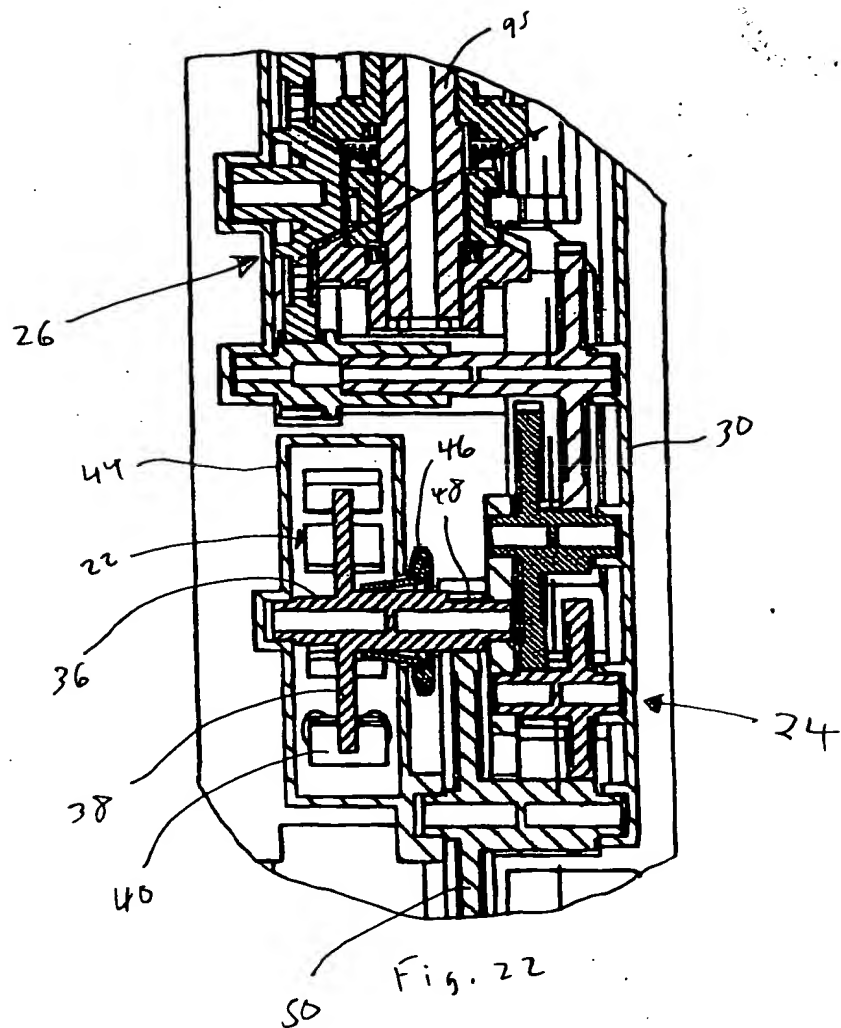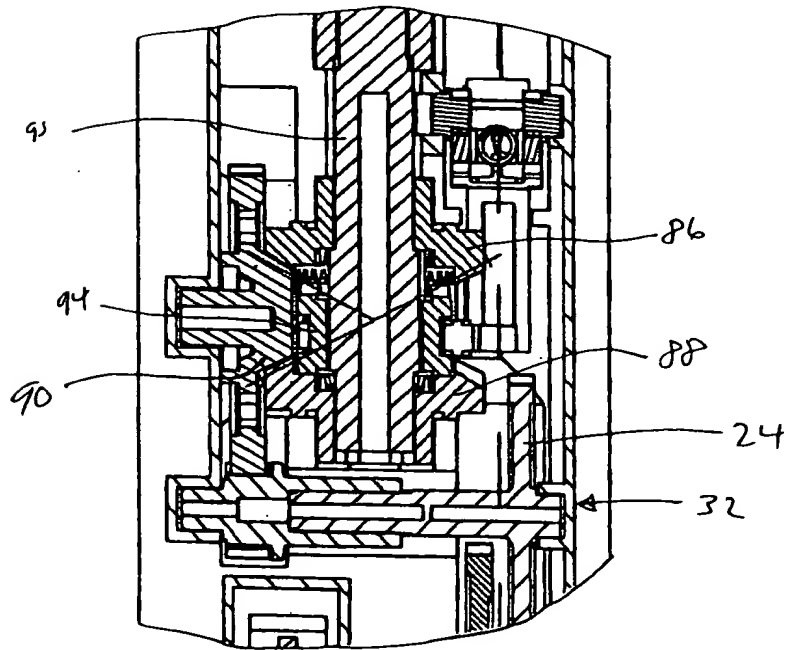


09656729-400404

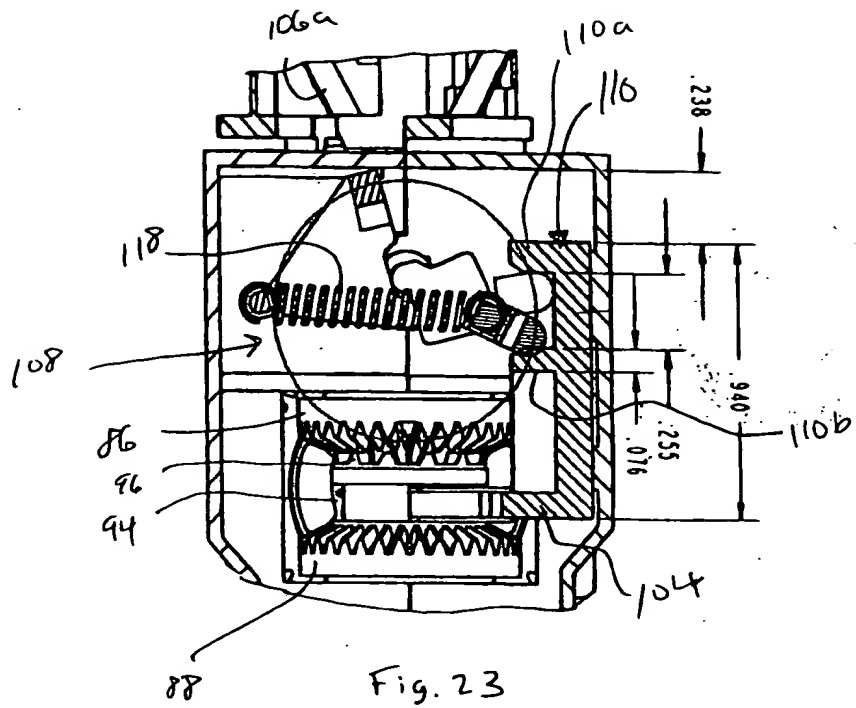


09696729 400464

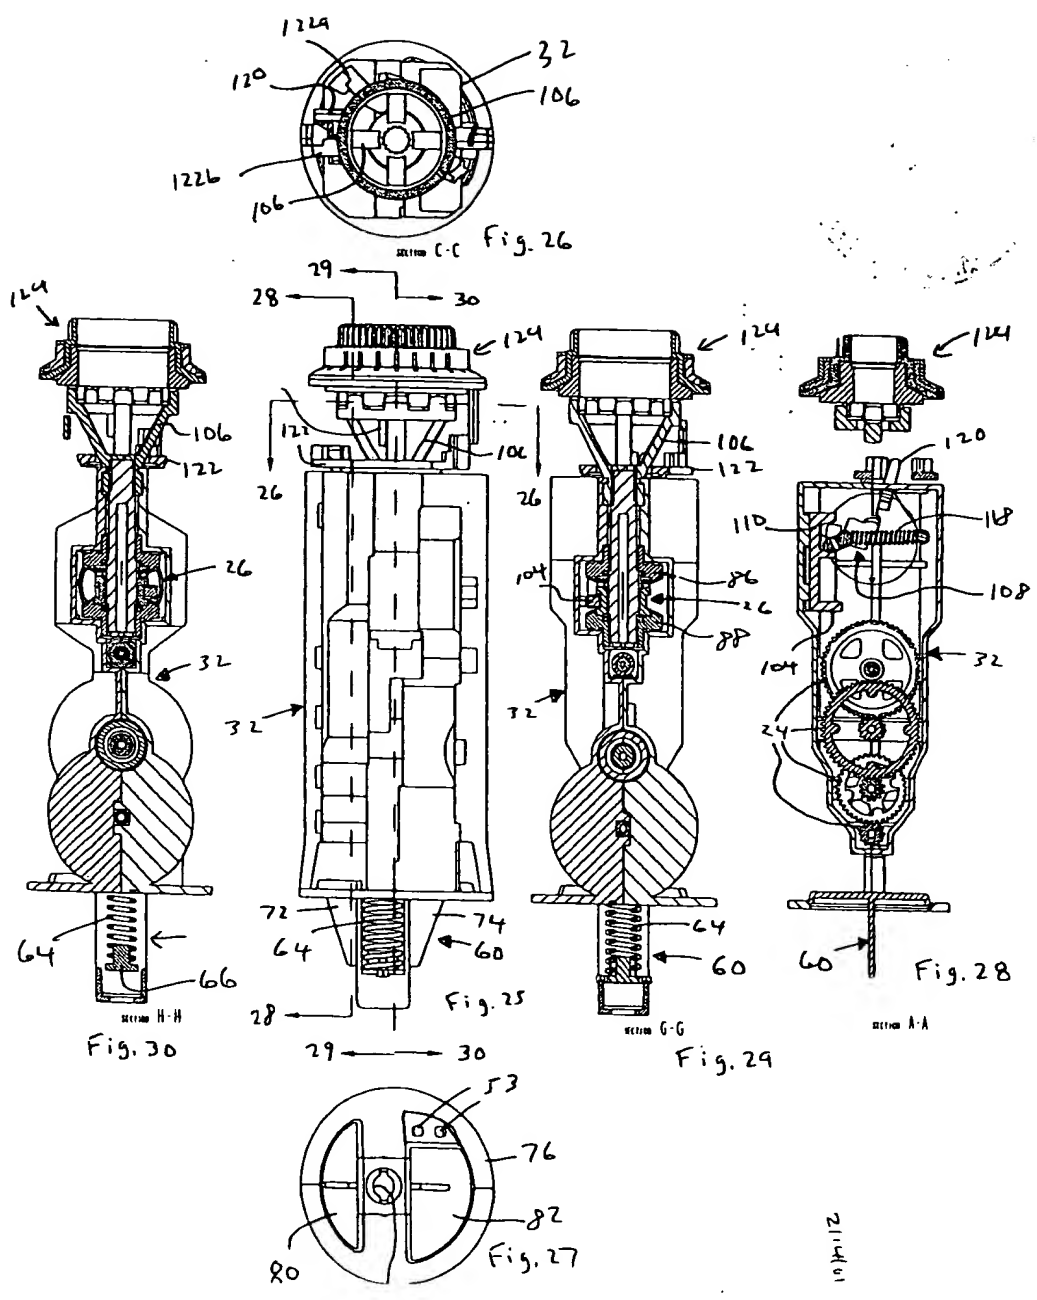

00000729-100404

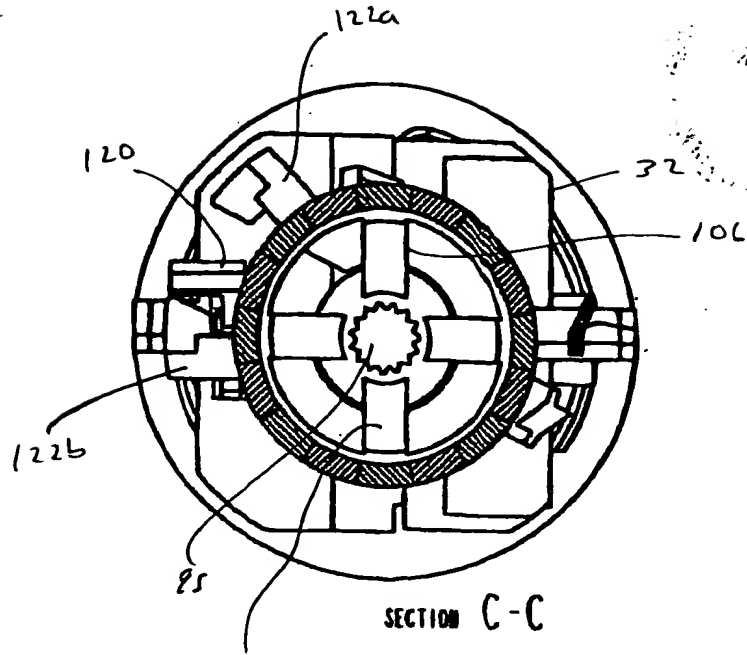

106a Fig. 31

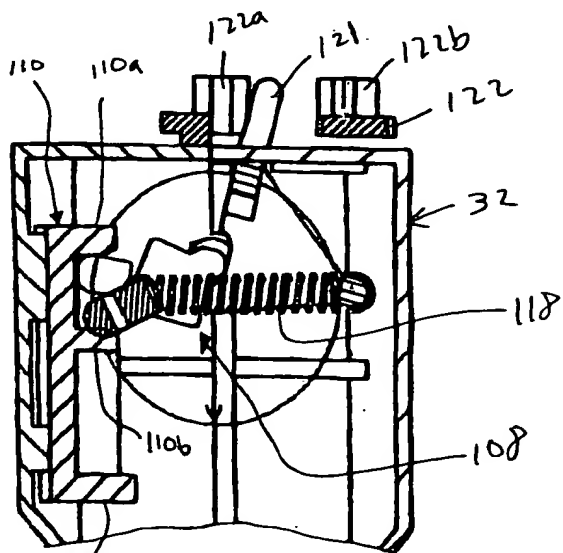

104 Fig. 32

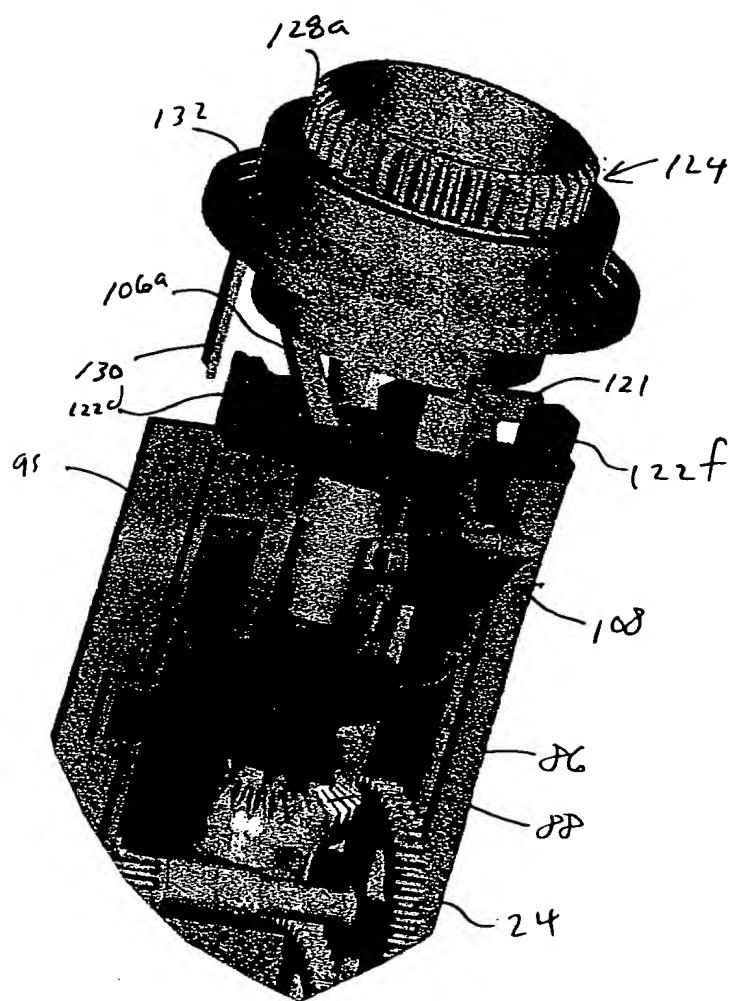


Fig. 33

[illegible]

Fig. 34

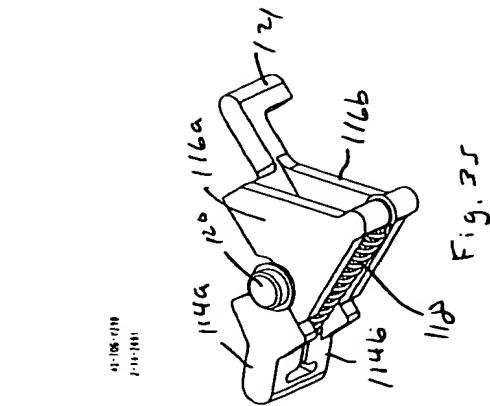


Fig. 35

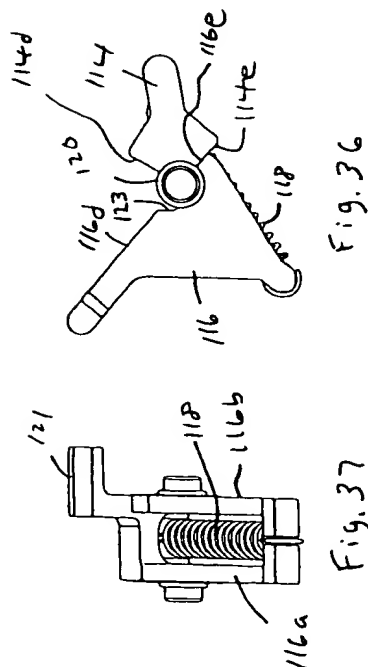


Fig. 36

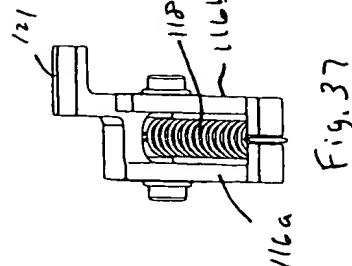


Fig. 37

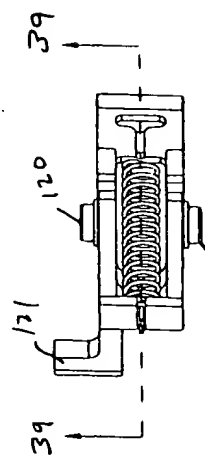


Fig. 38

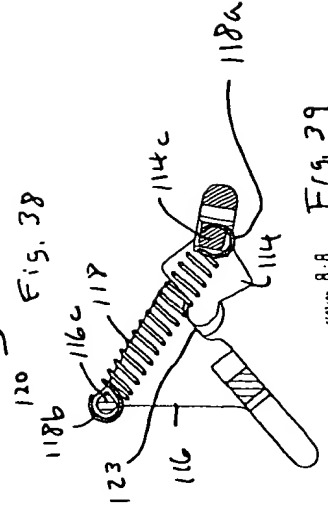


Fig. 39

SECTION 8-8

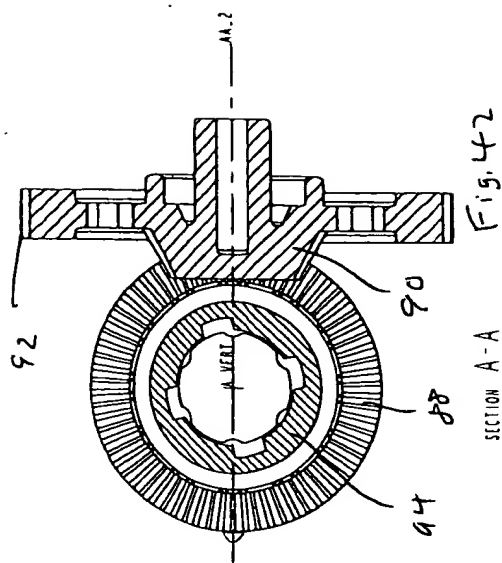


Fig. 42

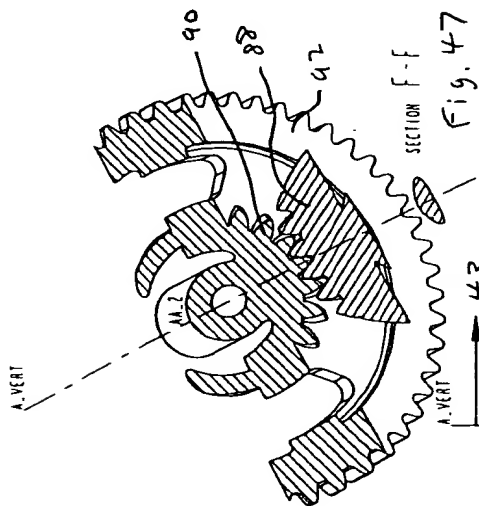


Fig. 47

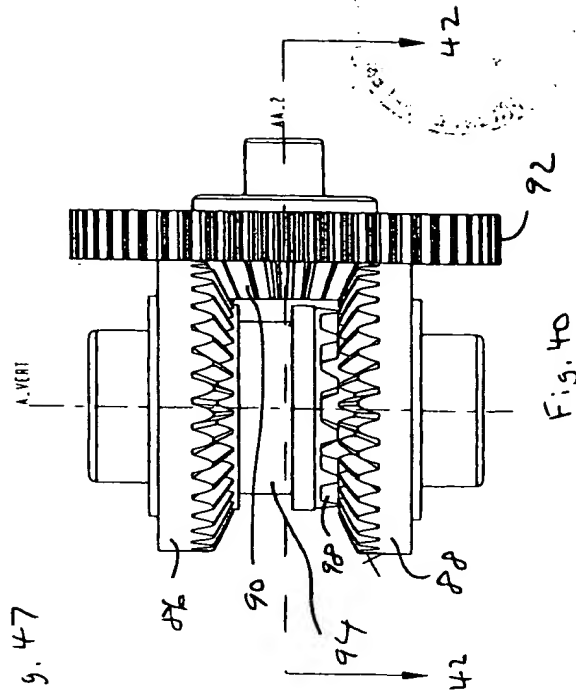


Fig. 40

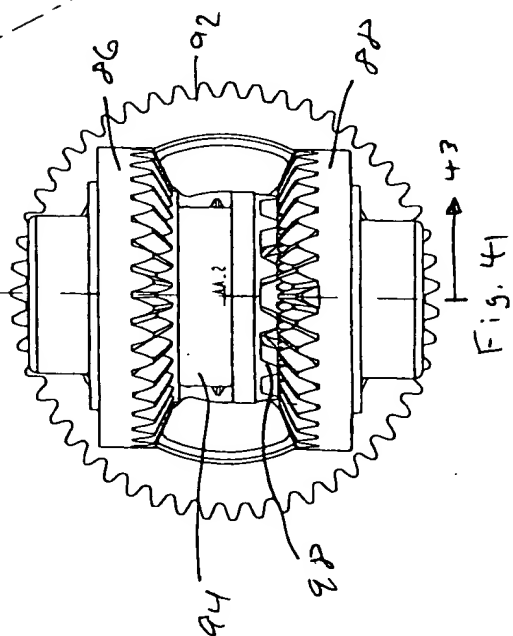


Fig. 41

09850729 "430404

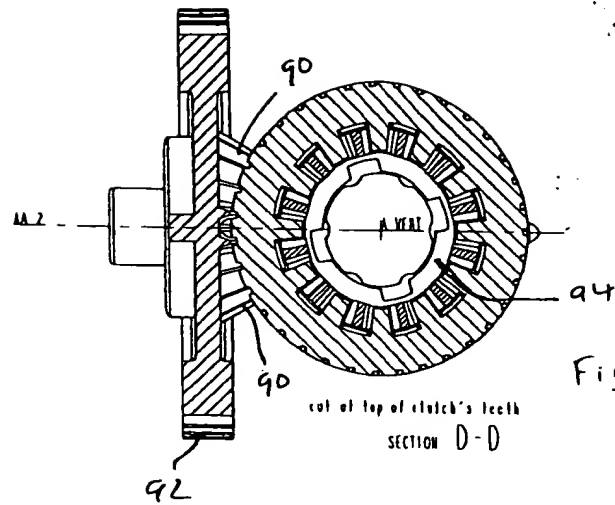


Fig. 44

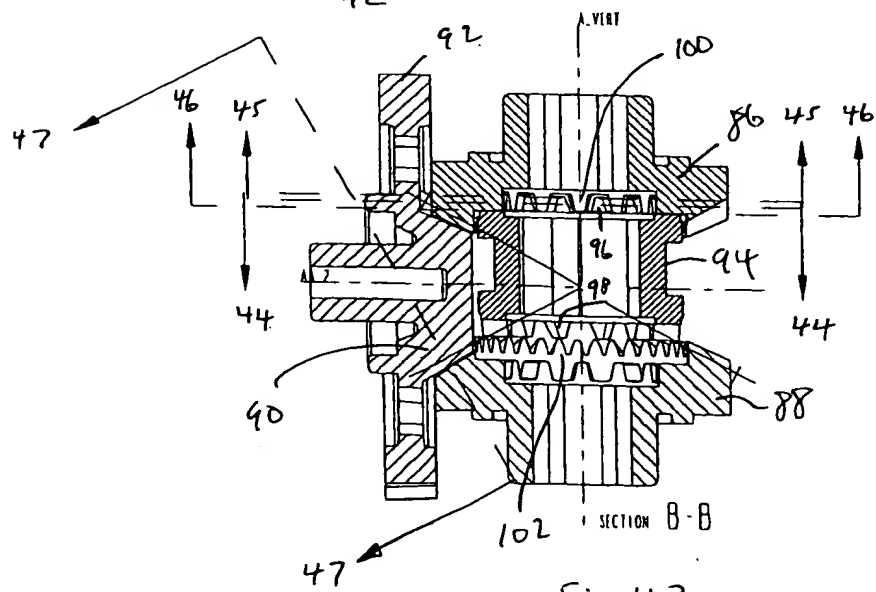


Fig. 43

09650729 400404

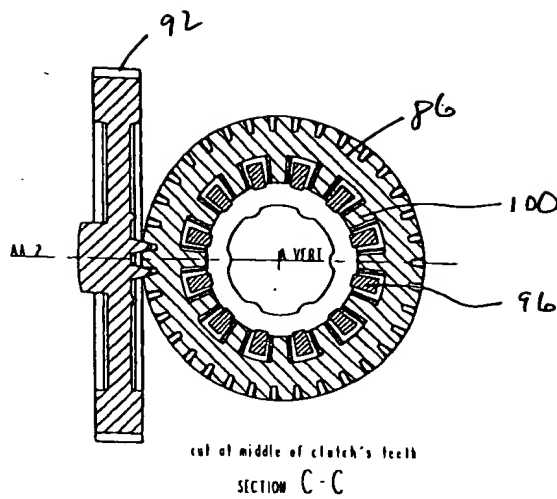


Fig. 45

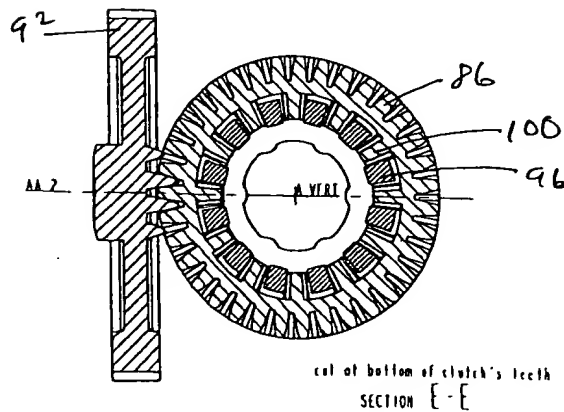


Fig. 46

09696725-100404

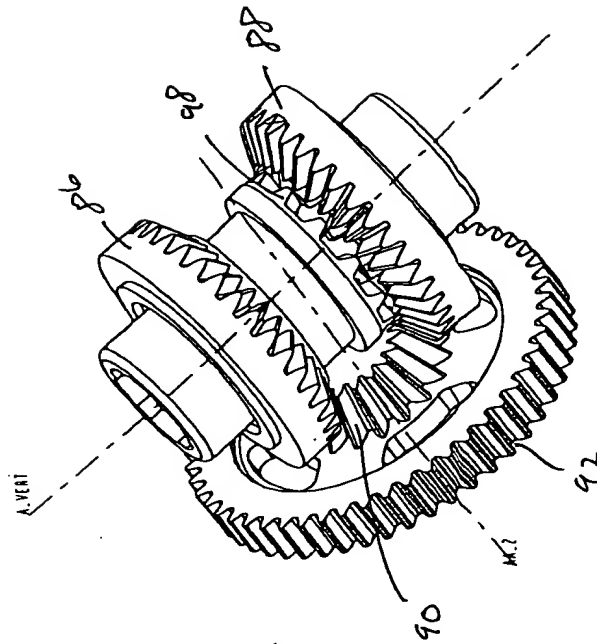


Fig. 49

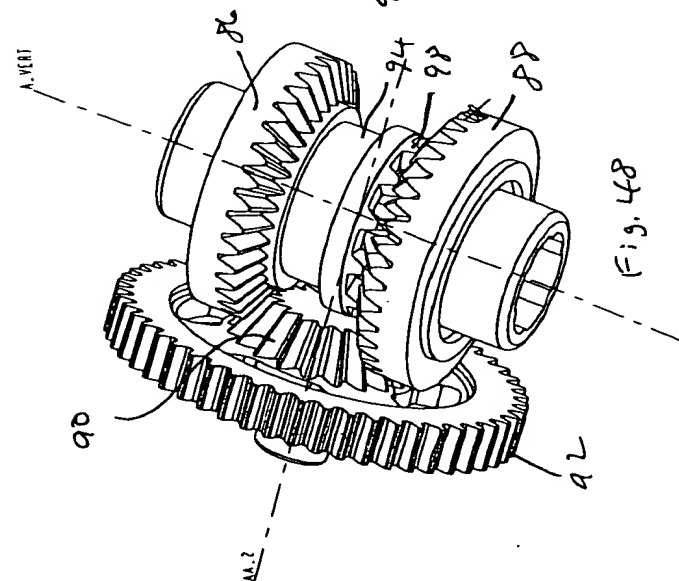


Fig. 48

09853729 40000000

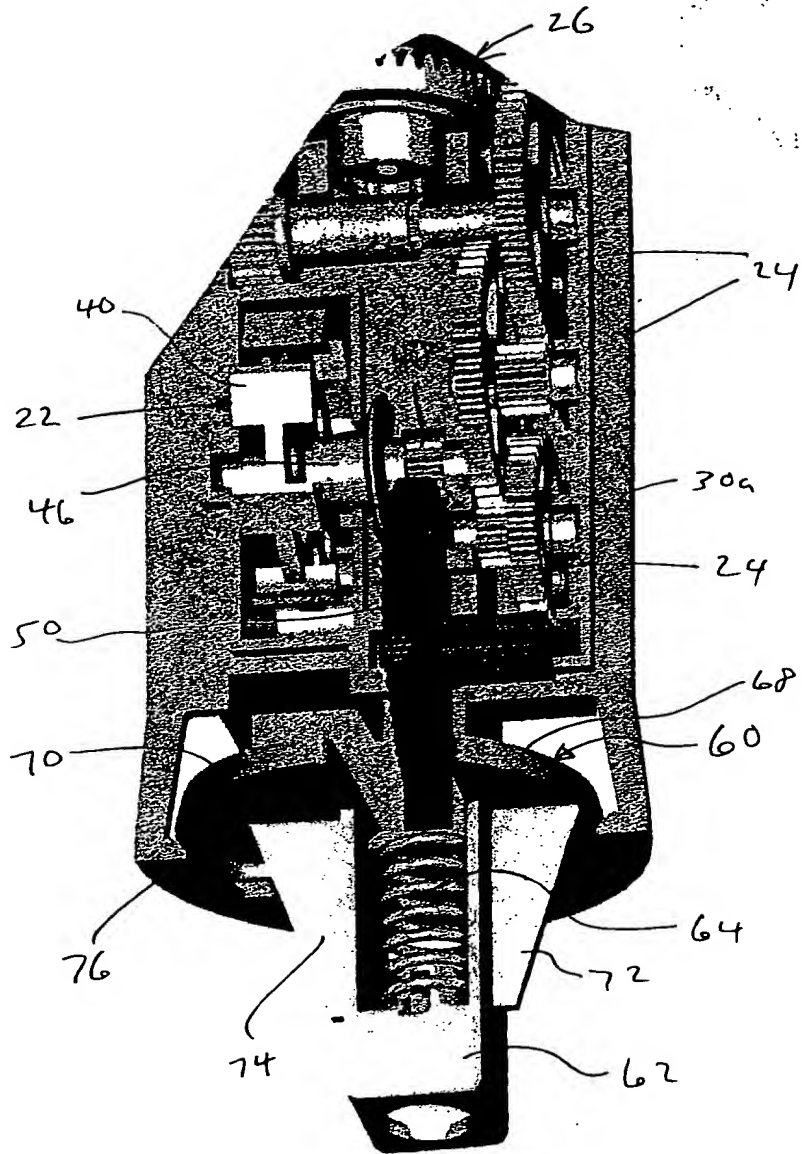
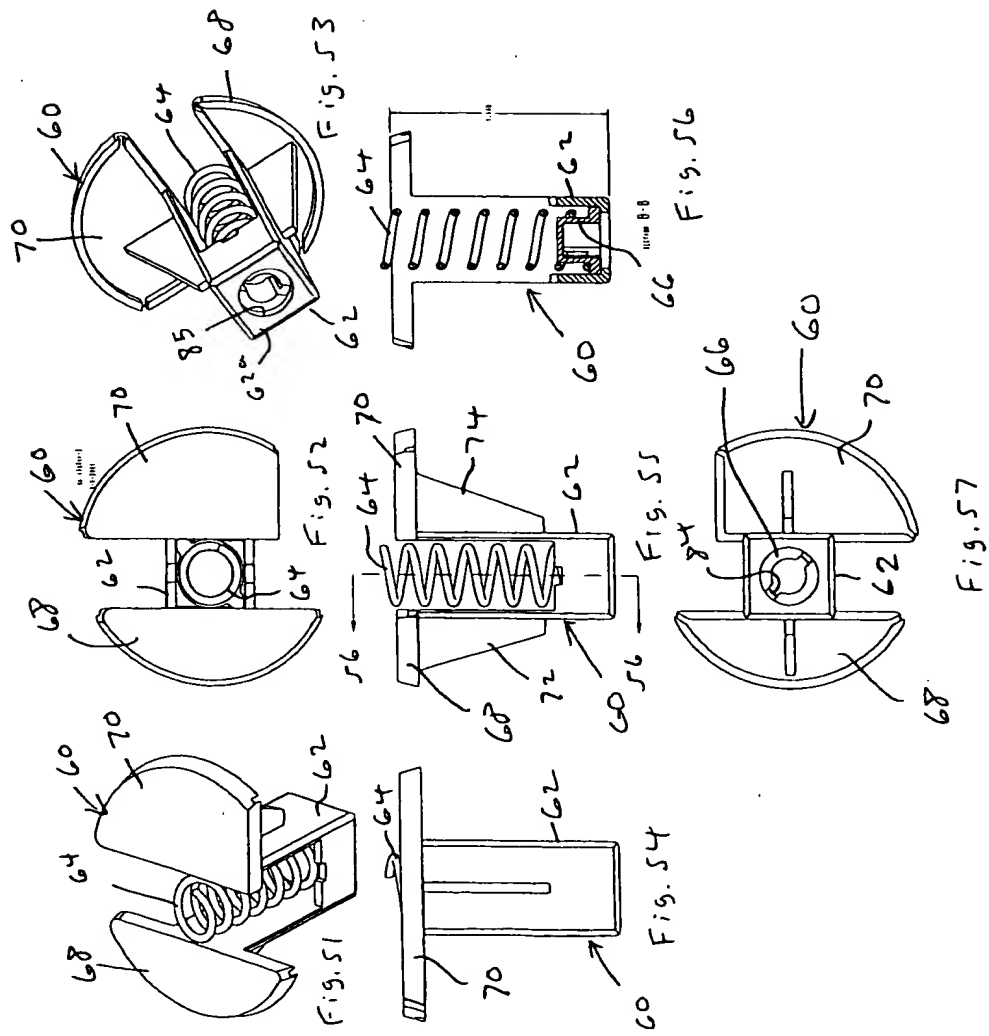


Fig. 50



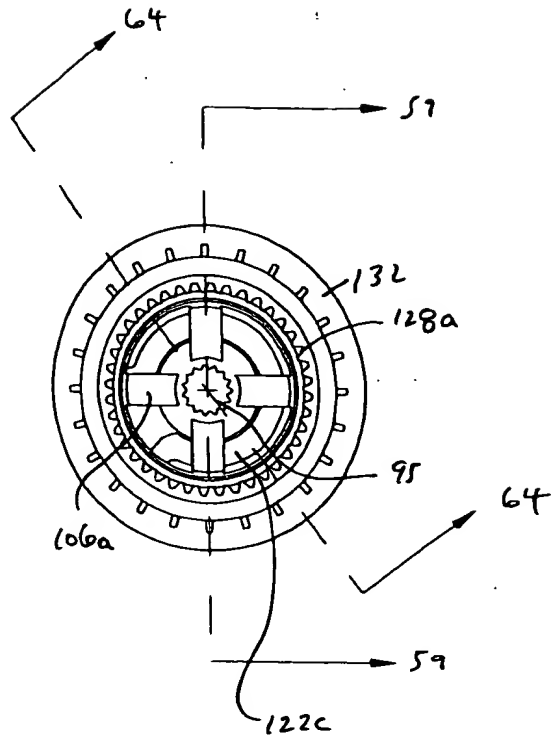


Fig. 58

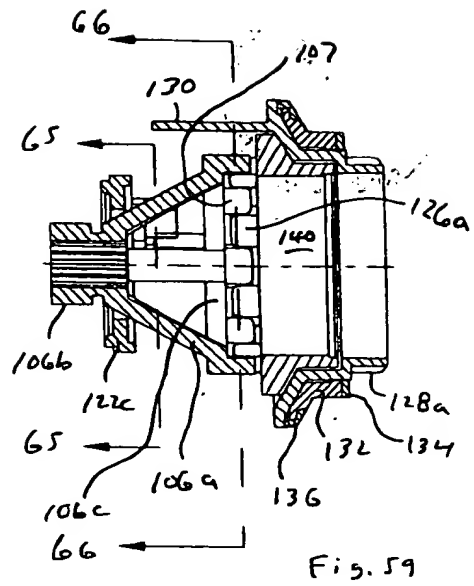


Fig. 59

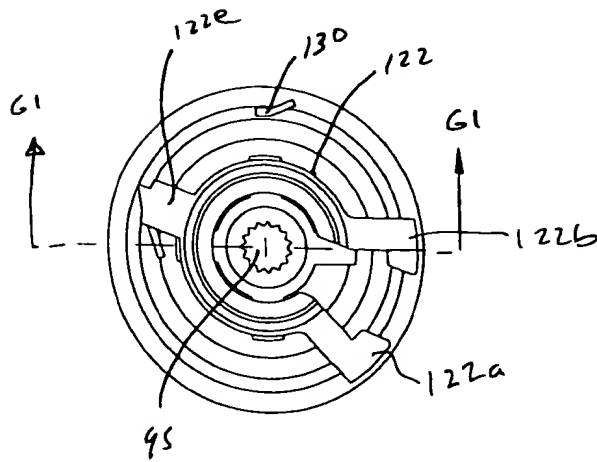


Fig. 60






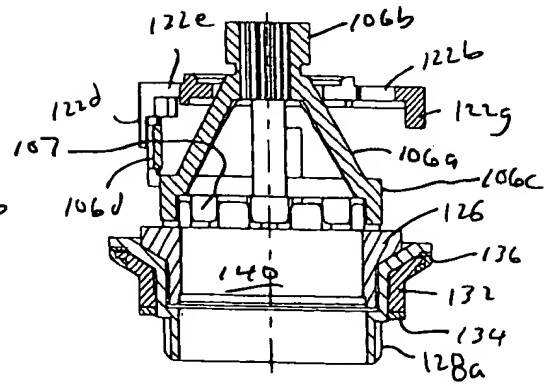


Fig. 61

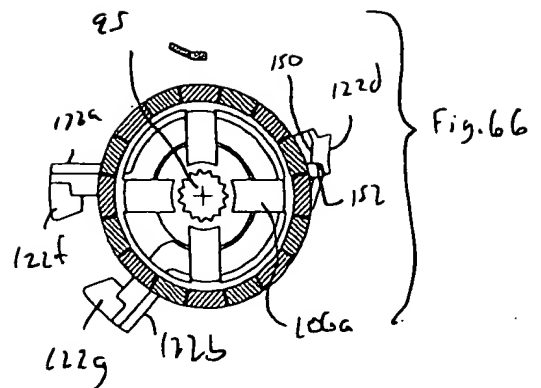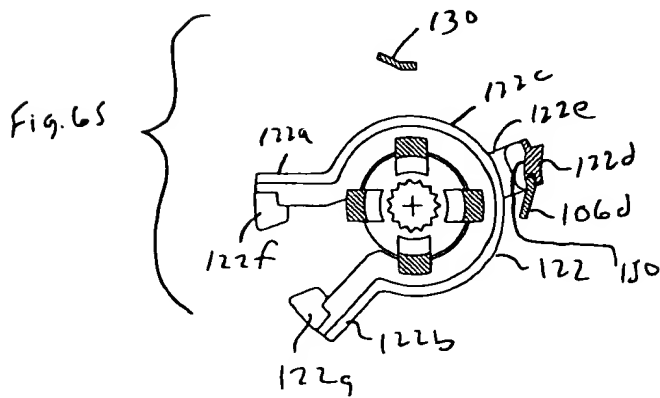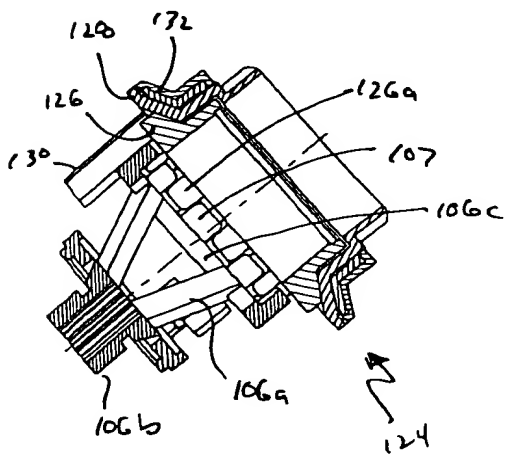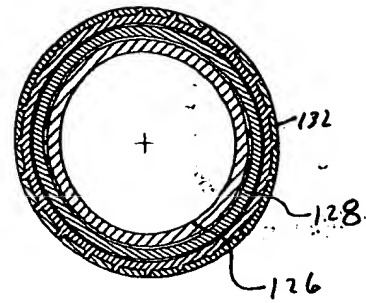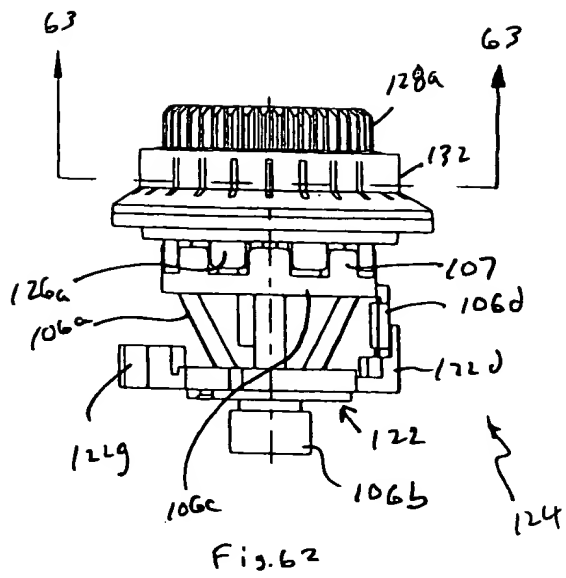

THE UNIVERSITY OF CHICAGO

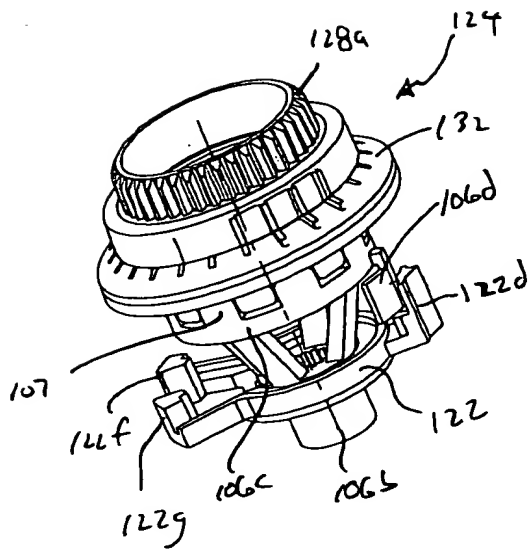


Fig. 67

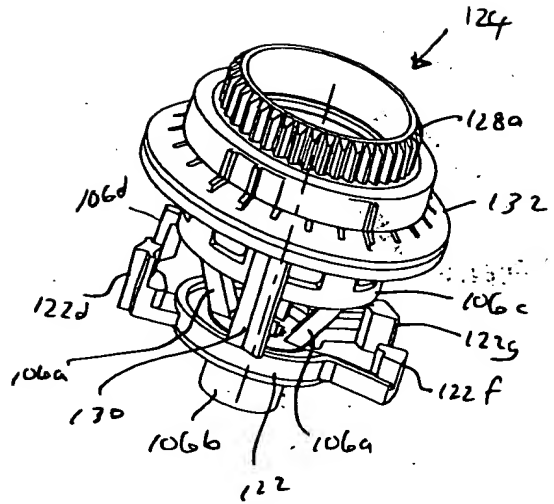


Fig. 68

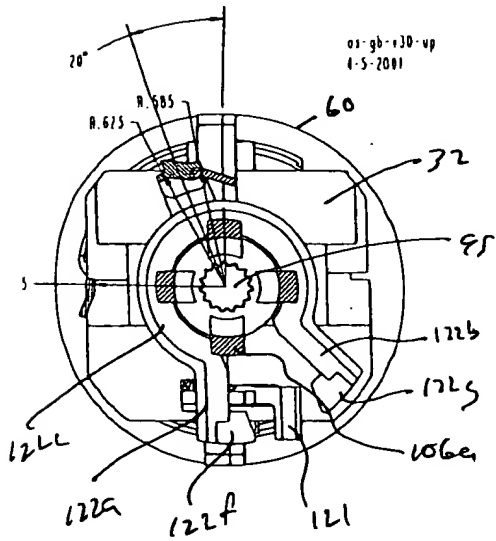


Fig. 73

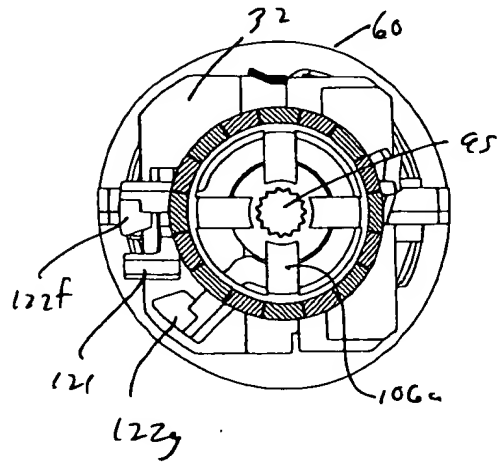


Fig. 74

Fig. 1 is a cross-sectional view of a mechanical assembly. The assembly includes a top housing (124) with a central opening (140) and a lower housing (128). A central shaft (106) passes through the assembly, supported by bearings (106a, 106b, 106c). A piston (130) is located in the lower housing, with a piston rod (107) extending upwards. A spring (60) is located at the bottom of the assembly. Various other components are labeled with numbers 126, 128a, 132, 134, 136, 73, and 32.

Fig. 70

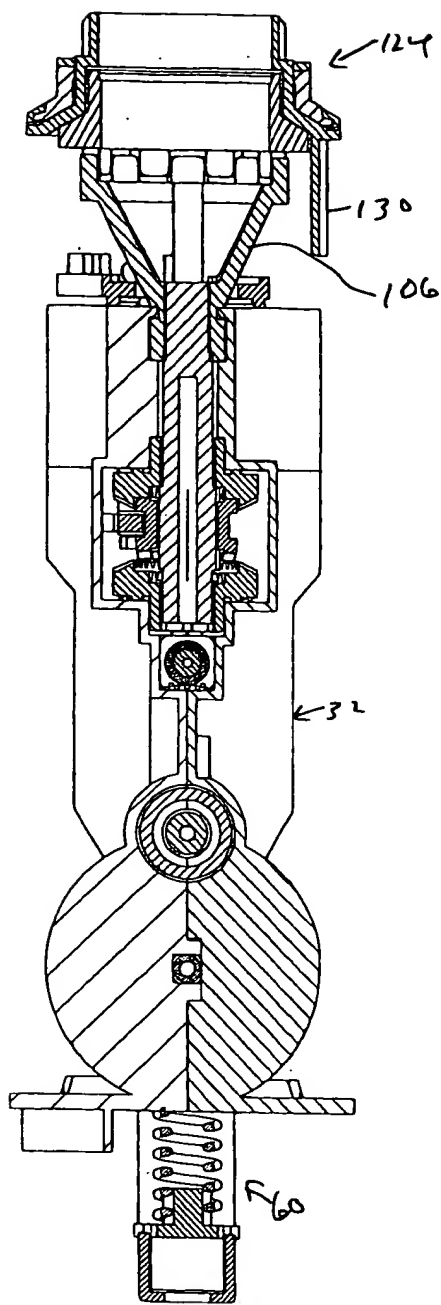


Fig. 71

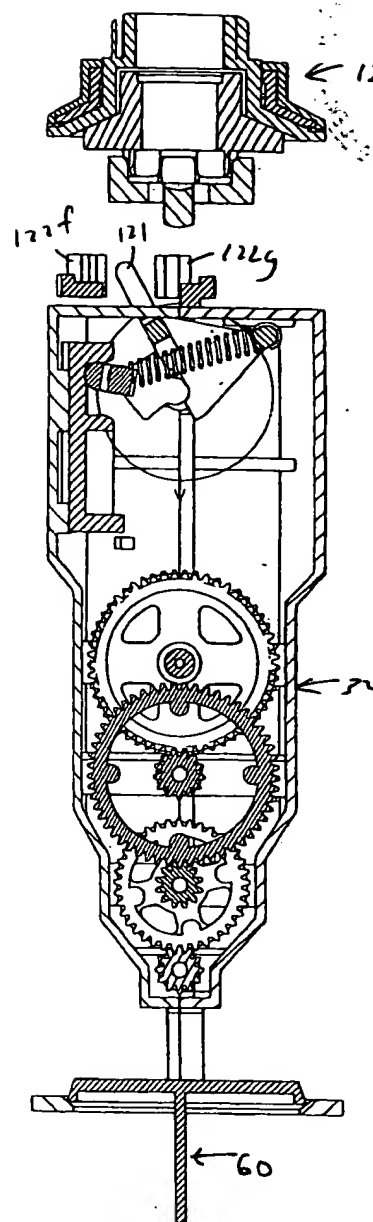


Fig. 72

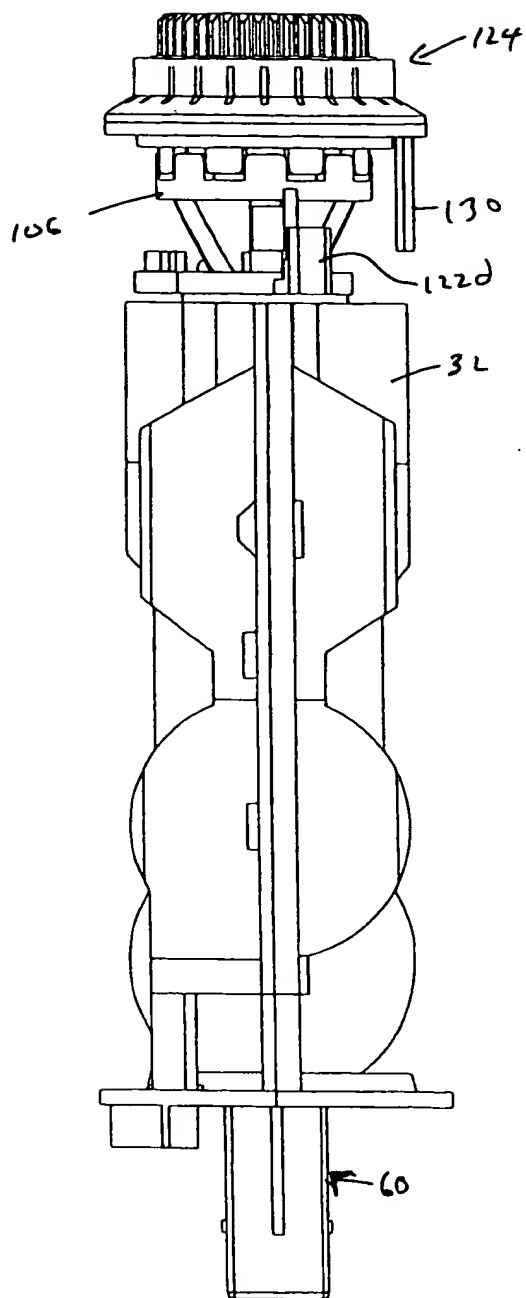


Fig. 75

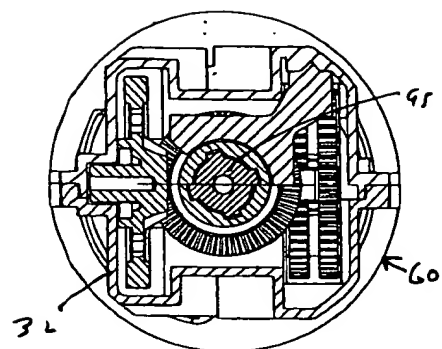


Fig. 77

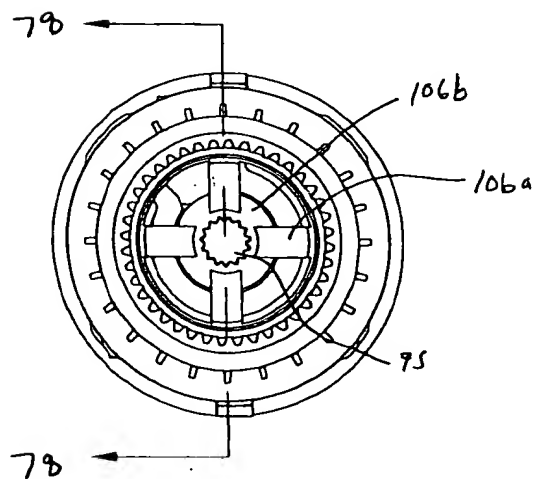


Fig. 76

Fig. 79


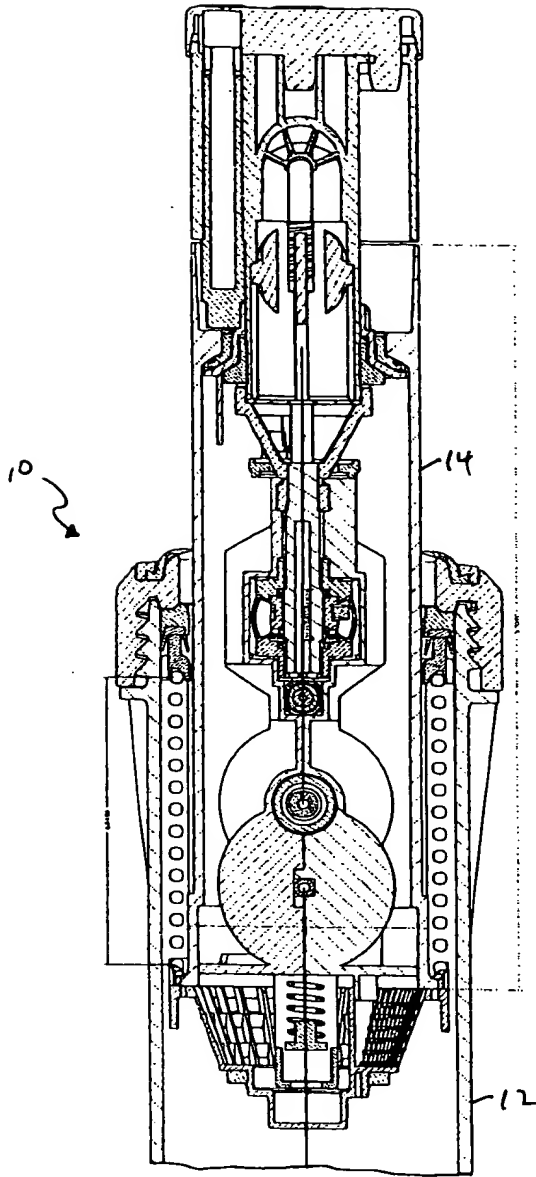


Fig. 80


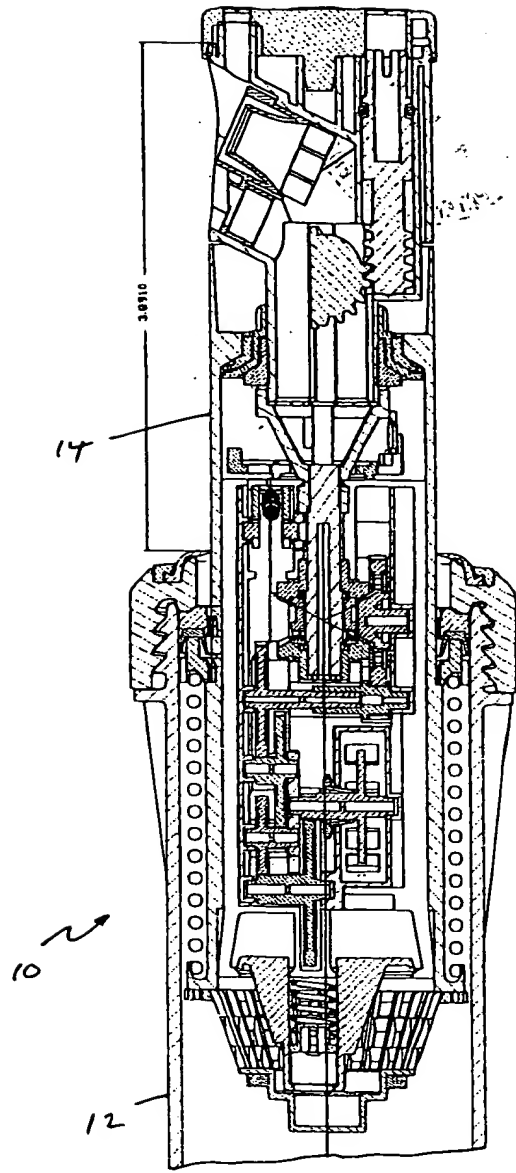


Fig. 81

00000729 400424
FOOT 62/05060

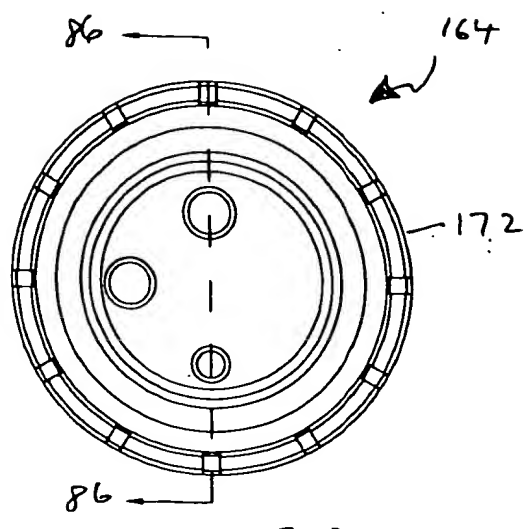


Fig. 89

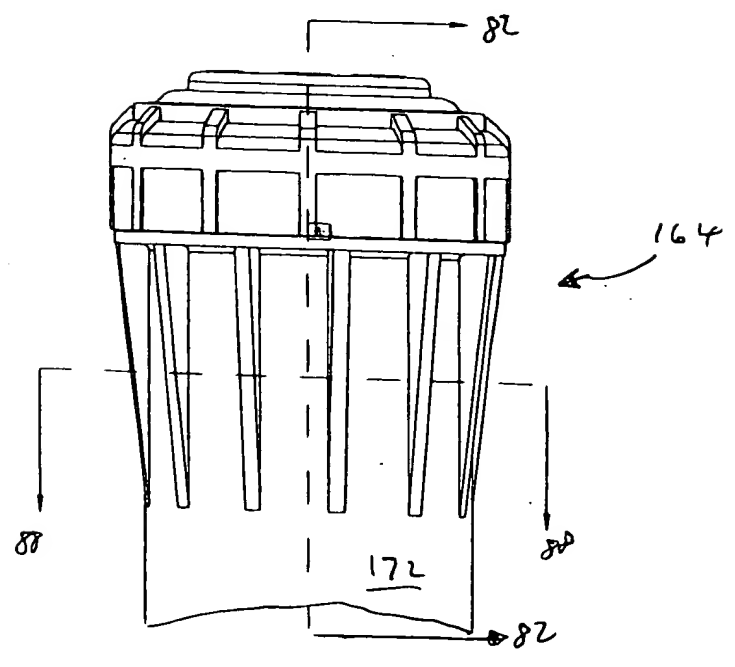


Fig. 90

